

OTDR Report (1310 nm (9 μm))

General Information

File name:	85_1310.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	2:57 PM	Fiber ID:	85
Cable ID:	FAR3 to FAR0 1A (B-A)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	FAR3	FAR0
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	2.4447 km	Average loss:	0.522 dB/km	Injection level:	25.2 dB
Span loss:	1.276 dB	Average splice loss:	---		
Span ORL:	36.94 dB	Maximum splice loss:	---		

Graph

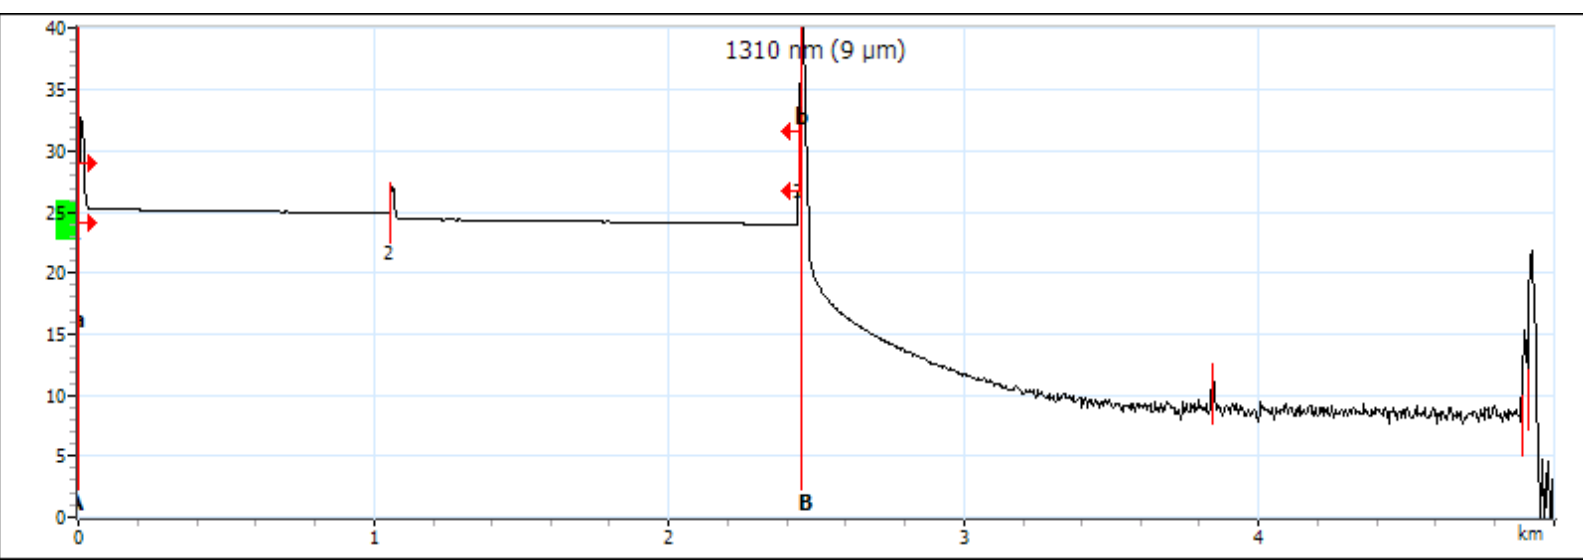

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.673 dB/km	A-B average loss:	-6.783 dB/km
a	0.0000	25.449	A-B LSA loss:	1.648 dB	4-point Event Loss:	-17.479 dB
A	0.0000	25.449	A-B ORL:	<31.00 dB	Maximum reflectance:	> -25.8 dB
B	2.4505	42.070				
b	2.4505	42.070				

OTDR Report (1310 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-44.2		0.000
Section		1.0564	0.363		0.343	0.363
Reflective	2	1.0564	0.450	-56.5		0.812
Section		1.3883	0.464		0.334	1.276
Reflective	3	2.4447	---	> -22.7		1.276
Section		1.3954	---		---	---
Reflective		3.8401	---	-55.9		---
Section		1.0526	---		---	---
Merged Events		4.8927	---	-32.2		---

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1310 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1310 nm (9 μm)
Range (km)	5.0000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.467700		
Backscatter (dB)	-79.45		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		

OTDR Report (1550 nm (9 μm))

General Information

File name:	85_1550.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	2:57 PM	Fiber ID:	85
Cable ID:	FAR3 to FAR0 1A (B-A)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	FAR3	FAR0
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	2.4450 km	Average loss:	0.331 dB/km	Injection level:	24.1 dB
Span loss:	0.808 dB	Average splice loss:	---		
Span ORL:	38.89 dB	Maximum splice loss:	---		

Graph

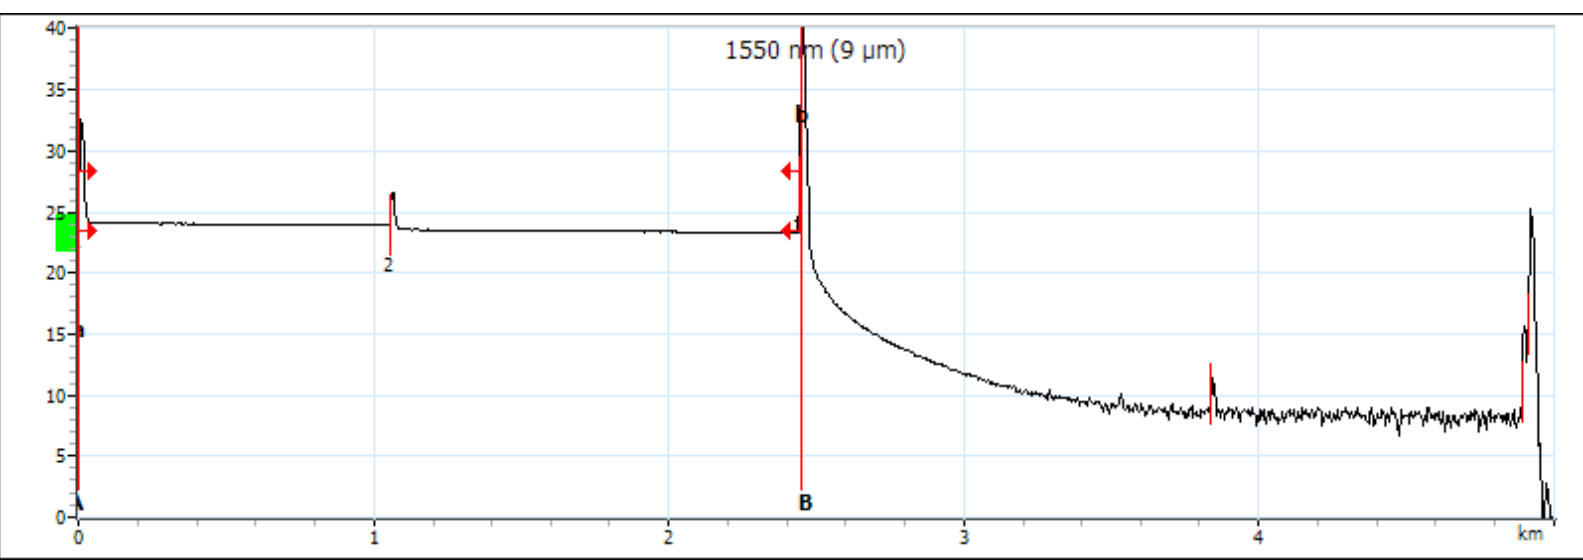

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.474 dB/km	A-B average loss:	-7.173 dB/km
a	0.0000	24.666	A-B LSA loss:	1.163 dB	4-point Event Loss:	-18.066 dB
A	0.0000	24.666	A-B ORL:	<31.15 dB	Maximum reflectance:	> -25.5 dB
B	2.4505	42.242				
b	2.4505	42.242				

OTDR Report (1550 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-44.5		0.000
Section		1.0566	0.201		0.190	0.201
Reflective	2	1.0566	0.332	-57.2		0.533
Section		1.3884	0.275		0.198	0.808
Reflective	3	2.4450	---	> -23.5		0.808
Section		1.3948	---		---	---
Reflective		3.8397	---	-56.3		---
Section		1.0521	---		---	---
Merged Events		4.8919	---	-27.1		---

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1550 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1550 nm (9 μm)
Range (km)	5.0000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.468325		
Backscatter (dB)	-81.87		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		